




FLAMESHIELD TAMPERPROOF CLASS 0 NOTICEBOARDS


Board core substrate material is fire rated, stable and hard wearing. Fabric cover is fire rated. Aluminium frame is anodised and has rounded safety corners. The fire rated polycarbonate locking hinged door is virtually shatterproof. The internal clearance between door and board surface is 20mm. Single door models can be fixed either portrait style or landscape and door is hinged to the long edge. Twin door models can only be fitted landscape. Wall fixings are included. This product is guaranteed for 2 years.

Technical Information

- Surface/Area size (mm): 900x600, 1200x900, 1200x1200, 1500x1200, 1800x1200, 2400x1200
- Size Depth (mm): 40
- Internal Clearance (mm): 24
- Frame Material: Anodised Satin Silver Aluminium
- Core Material: 8mm PVC CoExtruded Foam Core
- Door Material: Poly Carbonate
- Torsion/Max Load: n/a
- Magnetic: No
- Colour Options: Red, Blue, Grey, Green
- Fabric/Surface Options: Hessian
- Weight (kg): 5-14kg
- Fire Proof: Class 0 (B)
- Flip Chart: No
- Weatherproof: No
- Mobile/Locking Castor: No
- Self Assembly: No
- Heavy Duty: No
- Adjustable: No
- Guarantee: 2 years
- Quick Ship: No
- Storage/Stackable: No
- More sizes available on special order: Yes
- British Made: Yes
- FSC/Recycled: Yes, Board core

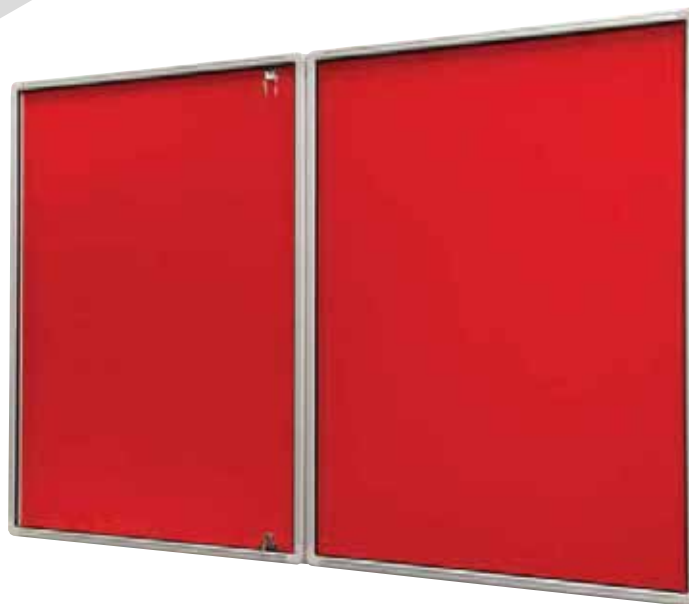


Flame Shield
Flame Retardant Products

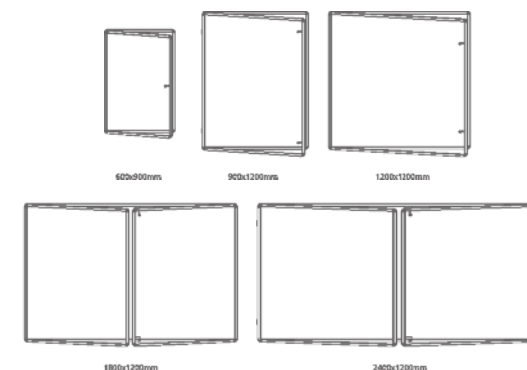

BOARD FELT COLOURS



BLUE



RED



GREEN



GREY

Standards: Shatterproof 3mm PET clear glazing panel Fire certified to BS476 Class 1 Y (Woven) to BS5867 Part 2 1 980 and BS467 Part 7 Class 1) - EN1 3501 -1 : 2007 BS EN 1 3823:2002 and BS EN1 1 925-2 or equivalent BS EN ISO 1 05-B02: 1 999, Colourfast to BS 1 006 Level 5 / 6 (Felt) Fire retardant to BS5867 Part 2 1 980, (Woven) to BS5867 Part 2 and BS467 Part 7 Class 1 , EN1 3501 -1 : 2007 BS EN 1 3823:2002 and BS EN1 1 925-2

Call: 01234 676767

Email: sales@officescreens.co.uk